

PET Flake Injection

Novel Technology Development

Initial information report required by Article 10(3) of Regulation (EU) 1616/2022 to be included along with a Novel Technology Development notification.

Update October 2025

Update of the existing dossier on the basis of new information
forthcoming from development activities

Article 10 - Requirements for the development of a novel technology

Contents

Article 10.1.....	3
Developer	3
Article 10.2.....	3
PET EUROPE – Producers’ Association	3
Territory Competent Authority:.....	3
Commission:	3
Uniform Resource Locator (‘URL’)	4
Novel Technology Summary – Flake Injection.....	4
Recycling Facilities/Technologies.....	4
Article 10.3.....	5
Article 10.3(a) - Characterisation of the novel technology based on the properties of recycling technologies set out in Article 3(2).....	5
Article 3.2(a) Input Material (Type, Collection, Origin).....	5
Article 3.2(b) Decontamination (Physical, Chemical, Principles, Practices).....	6
Article 3.2(c) rPET Materials & Articles (Type, Use).....	7
Article 3.2(d) Evaluation & Authorisation (need/absence)	7
Article 10.3(b) - Deviations from Articles 6, 7 and 8.....	8
Article 6 - Requirements for collection and pre-processing	8
Article 7 - Requirements for decontamination	8
Article 8 - Post-processing and use of recycled plastic materials and articles.....	8
Article 10.3(c) - Extensive reasoning and scientific evidence and studies – meets requirements of Article 3 of Regulation (EC) No 1935/2004.....	9
Flake To Resin (FTR)	9
Reversed Approach.....	9
Equipolymers Paste-In.....	10
TechnipZimmer.....	10
Artenius.....	10
US FDA Guidance	10
NIAS.....	11
Migration.....	11
Compliance Statements	12
Manufacturers, distributors or importers of Final Materials and Articles.....	12

Article 10.3(d) - Description of typical recycling processes using the technology, including a block diagram (<i>Simplified Flow Scheme</i>) of the main manufacturing stages.	13
Article 10.3(e) - Why the technology is considered NOVEL	14
Article 10.3(f) - Evaluation criteria	14
Novel Technology Analysis of NIAS by Proficient Laboratory	15
Novel Technology Monitoring	15
Article 10.3(g) - Recycling Facilities	15
Glossary	16
ANNEX I.....	17
ANNEX II.....	18

Article 10.1

Developer

PET EUROPE – Producers' Association.

Article 10.2

PET EUROPE – Producers' Association

Rue Théodore de Cuyper, 100
1200 Brussels – Belgium

Nadja Weiss – Secretary General / Flake Injection Consortium Manager

Phone: +351 937 107 064

email: nadja.weiss@pet-europe.org

web-site: www.pet-europe.org

Territory Competent Authority:

Belgium – National Competent Authority + FCM Applications

Federal Public Service Health, Food Chain Safety and Environment

Department – Food, Feed and Other Consumption Products

DG Animals, Plants and Foodstuffs

Avenue Galilée 5/2

B-1210 Brussels

Belgium

apf.food@health.fgov.be

Commission:

Directorate-General for Health and Food Safety (DG SANTE)

European Commission

1049 Bruxelles/Brussel

Belgium

Uniform Resource Locator ('URL')

<https://www.pet-europe.org/flake-injection-consortium/>

Novel Technology Summary – Flake Injection

The Flake Injection process has the capability to combine depolymerised recycled Polyethylene Terephthalate (rPET) with virgin material at different stages of a conventional PET production process for subsequent food contact use.

The input material of the Flake Injection process is previously processed PET as detailed in Table 2 of ANNEX I of COMMISSION REGULATION (EU) 2022/1616 and is deliberately depolymerized (pre-processed) before it enters into the high surface area decontamination polymerisation reactor.

Referring to the flow scheme [ANNEX I: Flake Injection – PET Production Process](#); previously processed PET may be introduced directly to injection point 1. or partially depolymerised with ethylene glycol, in either a stir-tank reactor or an extruder, to a defined degree of polymerisation to correspond with that of the polymer in the PET production process at the injection points labelled 2 to 6 in the flow scheme *or any points in-between*. This initial depolymerisation process of the previously processed PET allows for filtration of the intermediate polymer to remove solid contaminants before the introduction of the recycled material into a PET production process at a blend rate of up to 100% recycled content.

The high surface area decontamination polymerisation technology increases the Intrinsic Viscosity (IV) of the PET polymer and removes polymerisation by-products under high vacuum of less than 20mbar, with a high temperature greater than 260°C and with a residence time greater than 30 minutes. This high surface area polymerisation technology also serves as a Decontamination Technology to efficiently remove vapourised contaminants that may have been introduced into the process further upstream by the addition of previously processed PET.

Following the high surface area polymerisation and decontamination, the polymer melt is filtered for either direct use, or granulation, in the manufacture of food contact materials or articles or for introduction into a Solid State Polycondensation (SSP) process or a Conditioning Silo should further processing be needed to meet the material parameters required for its end use.

Recycling Facilities/Technologies

Company	Address
JBF Global Europe	Nijverheidsweg 4, 2430 Laakdal, Belgium
JBF BAHRAIN W.L.	Building : 461, Road : 1508, Block : 115 ,P O Box : 50397, B I I P, Salman Industrial City, Al Hidd, Kingdom of Bahrain
NEO GROUP	Industrijos St. 2, LT-95346 Rimkai, Dvilai eldership, Klaipeda district, LT
Equipolymers GmbH	Equipolymers GmbH, Werk Schkopau, Building K80, 06258 Schkopau, DE
Novapet	Polígono Industrial Valle del Cinca s/n, 22300 Barbastro, Huesca, ES
CuRe Technology BV	Eerste Bokslootweg 17, 7821 AT Emmen, NL

Company	Address
Indorama Ventures Poland	ul. Krzywa Góra 19, 87-805 Włocławek, PL
Indorama Ventures Quimica	Poligono Industrial Guadarranque S/N 11360 San Roque, Cádiz, ES
Indorama Ventures Corlu PET	Karamehmet Mahallesi Avrupa Serbest Bölgesi 3. Sokak No:2 Ergene/Tekirdağ/Türkiye
Alpek Polyester UK Ltd	Wilton Site, Redcar, Cleveland, UK
Octal SAOC	FZC, Raysut Area, P.O.B. 383, PC 217, Salalah, Sultanate of Oman
PLASTIVERD, PET Reciclado S.A.	Avinguda Remolar, 2, 08820 El Prat de Llobregat (Barcelona), ES
Polyplex Corporation Limited	Lohia Head Road Village Amau Khatima - 262308, District- Udham Singh Nagar, Uttarakhand, India
Polyplex (Thailand) Public Company Limited	60/24, 60/91, 60/109, Siam Eastern Industrial Park Moo 3, Tambol Mabyangporn, Amphur Pluakdaeng, Rayong 21140, Thailand
Polyplex Europa Polyester Film Sanayi Ve Ticaret Anonim Sirketi	Karamehmet Mh. Avrupa Serbest Bolgesi 3. Sokak No: 4, Ergene/Tekirdag, Turkey
SELENIS PORTUGAL, S.A.	Quinta S. Vicente, Estrada Nacional 246, 7300-436 Portalegre, Portugal
Thai Shinkong Industry Co., Ltd. (TSIC)	No. 54, Harindhorn Bldg. 7th FL, North Sathorn Rd., Silom, Bangrak, Bangkok 10500, Thailand
Far Eastern New Century Corporation	No. 369&600, Sec. Yadong, Wunshan Rd., Xinpu Township, Hsinchu County, Taiwan, R.O.C.

Article 10.3

Article 10.3(a) - Characterisation of the novel technology based on the properties of recycling technologies set out in Article 3(2)

Article 3.2(a) Input Material (Type, Collection, Origin)

The input material of the Flake Injection process is previously processed PET as detailed in Table 2 of ANNEX I of COMMISSION REGULATION (EU) 2022/1616.

The flakes may be sourced from recycling facilities where the feedstock of post-consumer PET packaging has been manufactured from food grade PET material in compliance with Regulation (EU) No 10/2011 on plastic materials and articles intended to come into contact with food. or the global regional equivalent.

Generic Specification for Flakes which may be adapted dependent upon the individual pre-processing technology used –

Typical Physical Properties			
Property	Minimum	Maximum	Units
Moisture Content		1.3	%
Bulk Density	200	400	kgm ⁻³
Flake Size	2	15	mm (85%)
Small Particles		0.2	% (< 0.5mm)

Typical Residuals		
Property	Maximum	Units
PVC	50	mg/kg
Polyolefin (caps/labels)	20	mg/kg
Other Polymers	100	mg/kg
Metal	10	mg/kg
Other Inert Materials	30	mg/kg

Product Description: Recycled PET flakes produced by mechanical recycling of pre-processed PET


Article 3.2(b) Decontamination (Physical, Chemical, Principles, Practices)

Stir-Tank Reactor or Extruder:

Previously processed PET undergoes pre-processing such as sorting, grinding, washing, and/or compacting, filtration and pelletisation before it may be introduced directly to injection point 1. or partially depolymerised with ethylene glycol, in either a stir-tank reactor or an extruder, to a defined degree of polymerisation to correspond with that of the polymer in the PET production process at the injection points labelled 2 to 6 in the flow scheme ([ANNEX I](#)) or any points in-between.

This initial depolymerisation pre-processing of the previously processed PET allows for filtration of the intermediate polymer to remove solid contaminants before the introduction of the recycled material into a PET production process.

Degree of polymerisation, as measured by molecular weight, is based on Intrinsic Viscosity (IV) range necessary for fabrication of intended downstream articles. It is known in the PET industry that some limited articles must be processed with PET at an IV of 0.57dl/g, but most applications require a much higher IV, hence 0.55dl/g was selected to be below this known useful limit.

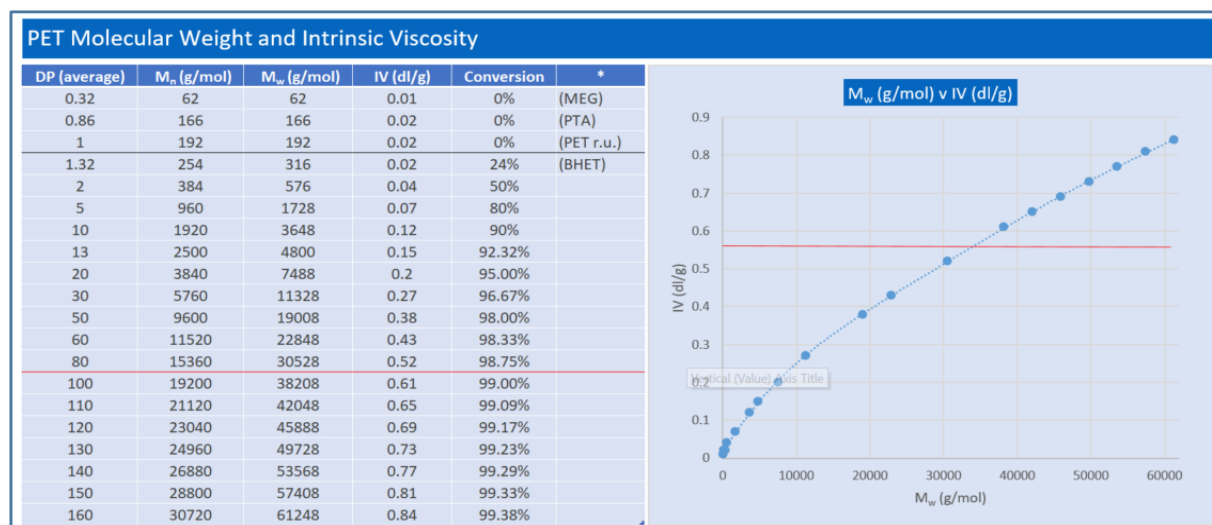

High Surface Area Polymerisation:

Despite the injection point of the previously processed PET polymer into the PET production process, all homogenised recycle and virgin material (plastic input) must pass through a High Surface Area Polymerisation reactor.

This high surface area polymerisation technology serves as a decontamination technology by removing volatile contaminants that may have been introduced into the process further upstream by the addition of previously processed PET, and also volatile polymerisation by-products, under a high vacuum of less than 20mbar, with a temperature greater than 260°C and with a residence time greater than 30 minutes.

The high surface area polymerisation technology increases the Intrinsic Viscosity (IV) of the PET polymer to a useful level required to manufacture finished products or articles.

Article 3.2(c) rPET Materials & Articles (Type, Use)

The recycled PET obtained from this process is intended to be used at up to 100% for the manufacture of materials and articles for contact with all types of foodstuffs for long-term storage at room temperature, with or without hotfill and includes PET suitable to be used in microwave and conventional ovens.

Article 3.2(d) Evaluation & Authorisation (need/absence)

Due to the high diffusion rates of compounds in molten PET in the high surface area polymerisation technology, which is the critical stage of this recycling technology, the plastic input is decontaminated to a level which does not pose a risk to human health. The conditions that the plastic input is subjected to are more severe than parameters established for Mechanical Recycling processes which are deemed Suitable Technologies. These processes have been evaluated by the EFSA Panel on Food Contact Materials, Enzymes and Processing Aids (CEP), and positive scientific opinions have been adopted.

Extensive work has been carried out which clearly demonstrates the PET produced from Flake Injection technologies, which have been operating safely in full compliance with Regulation (EU)

10/2011 in the European Union for more than 12 years, is comparable to virgin PET in terms of Non-Intentionally Added Substances (NIAS), and the safety of the PET articles produced, has been demonstrated through migration testing and modelling throughout this period.

Refer also to Article 10.3(c) - Extensive reasoning and scientific evidence and studies – meets requirements of Article 3 of Regulation (EC) No 1935/2004.

Note also that following the high surface area polymerisation and decontamination, the polymer melt is filtered for subsequent use in the manufacture of food contact materials or articles or for introduction into a Solid State Polycondensation (SSP) process or a Conditioning Silo should further processing be needed to meet the material parameters required for its end use.

[Article 10.3\(b\) - Deviations from Articles 6, 7 and 8](#)

[Article 6 - Requirements for collection and pre-processing](#)

- 1.(b) the plastic waste originates only from plastic materials and articles manufactured in accordance with Regulation (EU) No 10/2011 or recycled plastic materials and articles manufactured in accordance with this Regulation;*

The global regional equivalent of Regulation (EU) No 10/2011 may apply for internationally sourced material. Note: EFSA have issued positive opinions for recycling processes located in many countries outside of the European Union.

[Article 7 - Requirements for decontamination](#)

- 1. The plastic input and output of the applied decontamination process shall meet the specifications set out in column 3, 5, and 6 of table 1 of Annex I for the relevant recycling technology and, if applicable, the specific criteria set out in the authorisation.*
- 2. The decontamination process shall be carried out in accordance with the relevant specifications and requirements laid out in column 8 of table 1 of Annex I and, if applicable, the specific criteria set out in the authorisation. Recyclers shall ensure compliance with Regulation (EC) No 2023/2006.*

Once Novel Technology – Flake Injection - has been deemed Suitable Technology then the specifications and requirements will be added as a new row referencing this technology, in Table 1 of Annex I of COMMISSION REGULATION (EU) 2022/1616, will be met.

[Article 8 - Post-processing and use of recycled plastic materials and articles](#)

Following the high surface area polymerisation and decontamination, the polymer melt is filtered for subsequent use in the manufacture of food contact materials or articles or for introduction into a Solid State Polycondensation (SSP) process or a Conditioning Silo should further processing be needed to meet the material parameters required for its end use.

Article 10.3(c) - Extensive reasoning and scientific evidence and studies – meets requirements of Article 3 of Regulation (EC) No 1935/2004

Flake To Resin (FTR)

Ref. ANNEX II Table 1 (1) [Decontamination efficiency of a new post-consumer poly\(ethylene terephthalate\) \(PET\) recycling concept](#). FRANK WELLE. Fraunhofer Institute for Process Engineering and Packaging (IVV), Giggenhauser Straße 35, 85354 Freising, Germany.

Table VI. Concentrations (determined using the HFIP extraction method) of the surrogates in the investigated PET samples of Trial 2 (cocktail A at 10 ml min⁻¹, 50% PCR flakes).

	Concentration (ppm)						
	Toluene	Chloroform	Chlorobenzene	Phenyl cyclohexane	Methyl salicylate	Benzophenone	Lindane
Calculated contamination concentration	3295	5194	1255	327	1004	885	775
Before deep-cleansing	1999 ± 28	3075 ± 47	655 ± 9	163 ± 2	<1.0	345 ± 1	133 ± 1
After deep-cleansing (final product)	<2.7	<0.8	<0.9	<0.2	<1.0	<0.2	<0.8

The cleaning efficiencies for the applied surrogates are above or far above 99.9%. The high cleaning efficiencies are due to the high diffusion rates of compounds in the molten PET.

Based on EFSA's criteria for safety evaluation of PET recycling processes - if a recycling process is able to reduce an input reference contamination of 3 mg/kg PET to a Cres (Residual Concentration) not higher than a Cmod (Modelled Concentration) corresponding to the relevant migration criterion, the potential dietary exposure cannot be higher than 0.0025 µg/kg bw/day and recycled PET manufactured with such recycling process is not considered of safety concern.

Ref. ANNEX II Table 1 (2) [Fraunhofer Dossier-FTR 20061109.pdf](#)

Reversed Approach

Based on Safety Evaluation of Polyethylene Terephthalate Chemical Re-cycling Processes. Frank Welle. 'Reversed Approach'.

Ref. ANNEX II Table 1 (3) [!chemical_recycling_submitted.pdf](#)

FTR: Calculated maximum concentration (Reference Contamination – the level of contamination that the process can remove, i.e. Cmod:Cres =1) corresponding to a migration of 0.1 µg/l after storage for 365 d at 25 °C (EU cube, AP = 3.1, tau 1577 K, bottle wall thickness 200 µm, density of PET 1.4 g/cm³). Decontamination Efficiency of 99.9%.

mm Hg (25°C)	°C	g.mol ⁻¹	FTR	Reference Contamination	Decontamination Efficiency	Cres	Cmod	
Vapour Pressure	BP	Mw	Surrogate	mg/kg	%	mg/kg	mg/kg	Cmod:Cres
28.4	110.6	92.1	Toluene	90	99.9%	0.09	0.09	1.0
197	61.1	119.4	Chloroform	100	99.9%	0.10	0.10	1.0
12	131.7	112.6	Chlorobenzene	90	99.9%	0.09	0.09	1.0
0.0343	222.9	152.2	Methyl Salicylate	130	99.9%	0.13	0.13	1.0
0.04	240.1	160.3	Phenyl Cyclohexane	140	99.9%	0.14	0.14	1.0
0.00193	305.4	182.2	Benzophenone	160	99.9%	0.16	0.16	1.0
9.40E-06	311.0	290.8	Lindane	310	99.9%	0.31	0.31	1.0

Equipolymers.

EFSA-Q-2009-00783 - EFSA refused to evaluate as out of the scope of Regulation (EC) 282/2008.

Ref. ANNEX II Table 1 (4) [2012-EFSA Paste-in.pdf](#)

Ref. ANNEX II Table 1 (5) [petition paste in confidential.pdf](#)

Ref. ANNEX II Table 1 (6) [petition paste in public.pdf](#)

TechnipZimmer.

EFSA-Q-2016-00779 - EFSA refused to evaluate as out of the scope of Regulation (EC) 282/2008.

JBF FTR.

EFSA-Q-2014- 00495 - EFSA refused to evaluate as out of the scope of Regulation (EC) 282/2008.

Artenius.

EFSA-Q-2011-00969 - EFSA refused to evaluate as out of the scope of Regulation (EC) 282/2008.

Ref. ANNEX II Table 1 (7) [EFSA Letter Related to Artenius Unique Process.pdf](#)

Ref. ANNEX II Table 1 (8) [Fraunhofer Institute. Challenge Test.pdf](#)

US FDA Guidance

Use of Recycled Plastics in Food Packaging (Chemistry Considerations): Guidance for Industry.

U.S. Department of Health and Human Services Food and Drug Administration Center for Food Safety and Applied Nutrition July 2021

VIII. Elimination of Data Recommendations for 3° Recycling Processes for PET and PEN

Based on a comprehensive review of all surrogate testing data submitted over the past decade for 3° recycling processes for PET and polyethylene naphthalate (PEN), FDA concludes that 3° recycling of PET or PEN by methanolysis or glycolysis results in the production of monomers or oligomers that are readily purified to produce a finished polymer that is suitable for food-contact use. Both 3° processes will clean the polyester sufficiently to allow it to be considered of suitable purity, even assuming 100% migration of residual surrogate to food. This is a significant difference from the surrogate testing of 2° recycling processes. Secondary recycling processes often produce PET that is insufficiently cleaned to withstand 100% migration calculations for the residual surrogates. Under these circumstances, FDA recommends additional migration tests to demonstrate that the finished PET meets the 1.5 µg/person/day EDI limit.

Based on a determination that 3° recycling processes produce PET or PEN of suitable purity for food-contact use, FDA no longer recommends that such recyclers submit data for agency evaluation. Because 3° processes for polymers other than PET and PEN were not the subject of FDA reviews, recyclers who wish to engage in 3° recycling of polymers other than PET and PEN are encouraged to submit data for evaluation.

Ref. ANNEX II Table 1 (9) [Recycled-Plastics-Food-Packaging-Chemistry-Considerations-Guidance-04112022-1321.pdf](#)

NIAS

Ref. ANNEX II Table 1 (10) [211110_Report rPET 2007.pdf](#) JBF Global Europe - NIAS Universidad de Zaragoza Sample 2007 Flakes & Pellets

Ref. ANNEX II Table 1 (11) [211110_Report rPET 2002.pdf](#) Indorama - NIAS Universidad de Zaragoza Sample 2002 Flakes & Pellets

Ref. ANNEX II Table 1 (12) [APE 80\(RE30\) Screening Test.pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE30) Screening Test

Ref. ANNEX II Table 1 (13) [CSI Screening Tests APE 80\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE25) Screening Test

Ref. ANNEX II Table 1 (14) [22-191-V.pdf](#) JBF Global Europe -Outgassing and VOC determination in PET samples APE80RE30 x 3

Ref. ANNEX II Table 1 (15) [22-351-V.pdf](#) JBF Global Europe - Outgassing and VOC determination in PET samples APE80RE30 x 2, BS342 APE80RE30, BS352 APE80 FRH RE25, APE80, Inlet Flake x 2

Ref. ANNEX II Table 1 (16) [VOC analysis comparison Virgin PET - RPET.pdf](#) JBF Global Europe - VOC Comparison: APE80 Virgin -APE 80 FRH RE25 –APE 80 RE30

Ref. ANNEX II Table 1 (17) [VOC analysis flakes inlet vs end regrade batches.pdf](#) JBF Global Europe - Inlet PCR flake versus APE 80 RE30 VOC Analysis; Inlet PCR flake versus APE 80 FRH RE25 VOC Analysis

Migration

Ref. ANNEX II Table 1 (18) [158- Migration testing report-DPET-D15-PO89253-250X593-0% cPCW.pdf](#) Alpek Polyester UK Ltd Migration 0% rPET Content.

Ref. ANNEX II Table 1 (19) [160- Migration testing report- RDPET-D15-PO100092979-457X635-8% pPCW.pdf](#) Alpek Polyester UK Ltd Migration 8% rPET Content.

Ref. ANNEX II Table 1 (20) [161- Migration testing report- RDPET-D15-PO100092492-776X910 - 12% pPCW.pdf](#) Alpek Polyester UK Ltd Migration 12% rPET Content.

Ref. ANNEX II Table 1 (21) [164- Migration testing report- RDPET with pPCW 16%-31032021 to 06042021- Phase II.pdf](#) Alpek Polyester UK Ltd Migration 16% rPET Content.

Ref. ANNEX II Table 1 (22) [165- Migration testing report- RDPET with pPCW 25%-31032021 to 06042021- Phase II.pdf](#) Alpek Polyester UK Ltd Migration 25% rPET Content.

Ref. ANNEX II Table 1 (23) [APE 80\(RE30\) Migration Test Report.pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE30) Migration Report

Ref. ANNEX II Table 1 (24) [CSI Migration Tests APE 80\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE25) Migration Report

Ref. ANNEX II Table 1 (25) [CSI Migration Tests APE 80FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80FRH(RE25) Migration Report

Ref. ANNEX II Table 1 (26) [CSI Migration Tests APE 84FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 84FRH(RE25) Migration Report

Ref. ANNEX II Table 1 (27) [CSI Screening Tests APE 80FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80FRH(RE25) Migration Report

Ref. ANNEX II Table 1 (28) [CSI Screening Tests APE 84FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 84FRH(RE25) Migration Report

Ref. ANNEX II Table 1 (29) [2022 11 84 R0 84 R25 84 R30.xlsx](#) NEO GROUP - Migration Neopet 84FR (Virgin) v Neopet Cycle 84 FR R25 v Neopet Cycle FR R30

Ref. ANNEX II Table 1 (30) [Updated Mig Report 2020-1245Compliance APE 80\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE25) Migration Report (25/01/2021)

Ref. ANNEX II Table 1 (31) [Test report FDA, EU, ROHS etc for RPET 100% 2021.pdf](#) Polyplex 100% rPET Film for Packaging and Industrial Applications Migration and Compliance

Ref. ANNEX II Table 1 (32) [Test report OML-SML Heavy metal NIAS Sarafil RPET 90% 2019.pdf](#) Polyplex - 90% rPET A4 Films Migration and NIAS

Compliance Statements

Ref. ANNEX II Table 1 (33) [New EU Reg 2020,1245 Compliance 80\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE25) Statement of Food Contact Compliance

Ref. ANNEX II Table 1 (34) [One Page Mig Test Report APE 80\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE25) Statement of Food Contact Compliance

Ref. ANNEX II Table 1 (35) [One Page Mig Test Report APE 84FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 84FRH(RE25) Statement of Food Contact Compliance

Ref. ANNEX II Table 1 (36) [One Page Mig Test Report APE 80FRH\(RE25\).pdf](#) JBF Global Europe - PET bottles with resins APE 80FRH(RE25) Statement of Food Contact Compliance

Ref. ANNEX II Table 1 (37) [One Page Report APE 80\(RE30\).pdf](#) JBF Global Europe - PET bottles with resins APE 80(RE30) Statement of Food Contact Compliance

Manufacturers, distributors or importers of Final Materials and Articles

Ref. ANNEX II Table 1 (38) [2201129 Inq.pdf](#) JBF Global Europe - Logoplaste 380ml Bottle JBF 30% rPET Migration Report

Ref. ANNEX II Table 1 (39) [2201129 NIAS.pdf](#) JBF Global Europe - Logoplaste 380ml Bottle JBF 30% rPET NIAS Report

Ref. ANNEX II Table 1 (40) [Relatorio 2201129 Sensorial.pdf](#) JBF Global Europe - Logoplaste 380ml Bottle JBF 30% rPET Sensory Analysis

Article 10.3(d) - Description of typical recycling processes using the technology, including a block diagram ([Simplified Flow Scheme](#)) of the main manufacturing stages.

Previously processed PET undergoes pre-processing such as sorting, grinding, washing, and/or compacting, filtration and pelletisation before it may be introduced directly to injection point 1.

Post-consumer previously processed PET is partially depolymerised with ethylene glycol, in either a stir-tank reactor (Plastic Input B) or an extruder (Plastic Input C), to a defined degree of polymerisation (IV Range).

The degree of polymerisation is controlled to correspond with that of the virgin pre-polymer in the PET production process at the injection points labelled 2 to 6 in the flow scheme. The depolymerisation process of the post-consumer rPET allows for filtration of the polymer to remove solid contaminants before the introduction of the recycled material into the PET production process.

Pre-processed PET Input A – Direct to Paste Vessel

Pre-processed PET Input B – Stir-Tank Reactor.

Injection points:

- 2.) Esterification Vessels
- 3.) Low Polymerisation Vessels

Pre-processed PET Input C – Extruder.

Injection points:

- 4.) Esterification Vessels
- 5.) Low Polymerisation Vessels
- 6.) Before High Surface Area Polymerisation Reactor

Typically such processes are anticipated to run at 50% recycled content or less, but a blend rate of up to 100% recycled content is possible for processes with an injection point 6a capability.

Despite the injection point of the rPET pre-polymer into the PET production process, all homogenised recycle and virgin material (plastic input) must pass through a High Surface Area Polymerisation reactor.

The high surface area polymerisation technology increases the Intrinsic Viscosity (IV) of the PET polymer and removes polymerisation by-products under high vacuum of less than 20mbar, with a high temperature greater than 260°C and with a residence time greater than 30 minutes.

This high surface area polymerisation technology serves as the Decontamination Technology to efficiently remove any contaminants that may have been introduced into the process further upstream by the addition of recycled post-consumer flakes.

Due to the high diffusion rates of compounds in molten PET in the high surface area polymerisation technology, which is the critical stage of this recycling technology, the plastic input is decontaminated to a level which does not pose a risk to human health. The conditions that the plastic input is subjected to are more severe than parameters established for Mechanical Recycling processes which are deemed Suitable Technologies. These processes have been evaluated by the EFSA Panel on Food

Contact Materials, Enzymes and Processing Aids (CEP), and positive scientific opinions have been adopted.

Note also that following the high surface area polymerisation and decontamination, the polymer melt is filtered for subsequent use in the manufacture of food contact materials or articles or for introduction into a Solid State Polycondensation (SSP) process or a Conditioning Silo should further processing be needed to meet the material parameters required for its end use.

Solid State Polycondensation (SSP)

Before being transferred to the SSP, the decontaminated pellets are first crystallised at high temperature in e.g. a fluid bed crystalliser. These crystallised pellets are then continuously introduced into the solid state polycondensation reactor at a predefined temperature and for a predefined residence time to ensure that the final PET IV and product specification has been established.

Conditioning Silo

Similar to the SSP process but operated at a lower temperature to ensure that the final PET IV and product specification has been established.

Article 10.3(e) - Why the technology is considered NOVEL

Article 3(6) - Any recycling technology that has not been subject to a decision on its suitability in accordance with Article 15 or 16 shall be regarded as a novel technology for the purpose of this Regulation.

Article 15 - Decision on the suitability of a novel technology.

Article 16 - Safeguard clause concerning the placing on the market of recycled plastic materials and articles manufactured with a novel or suitable recycling technology.

Article 10.3(f) - Evaluation criteria

Referring to section: '[Reversed Approach](#)', based on the level of contamination acceptable, determined from the decontamination efficiency of High Surface Area Polymerisation technology of greater than 99.9% for all surrogates, testing of the Plastic Input material should not be critical but the input material will be analysed per the below proposed schedule.

[NIAS](#) testing has already been carried on typical flake samples.

A risk assessment in accordance with Article 19 of the Plastics Regulation (Regulation (EU) No 10/2011 on plastic materials and articles intended to come into contact with food) will be performed on the Intermediate Material produced.

Novel Technology Analysis of NIAS by Proficient Laboratory

Entry/Input

- Year 1 – every 6 months
- Year 2 – to be determined based on Year 1 results.
- Year 3 - to be determined based on Year 2 results.

Output/Exit

- Year 1 – every months
- Year 2 – to be determined based on Year 1 results.
- Year 3 - to be determined based on Year 2 results.

Novel Technology Monitoring

There shall be at least four stages (unless there is no difference between entry and input or output and exit):

- Entry stage (the first QA stage where the material enters the facility) - Flake analysis.
- Input stage (where the plastic input enters the decontamination process) - Plastic Input (6) no analysis required.
- Output stage (where the material leaves the decontamination process) - Can be sampled and analysed after the Post Processing Stage.
- Exit stage (where the recycled plastic or the recycled plastic materials and articles leave the facility) - Analysis before sale.

Typical VOCs such as Benzene to be analysed every Output/Exit Batch using appropriate techniques. Considering the high temperatures used during the decontamination process, the possibility of contamination by microorganisms can be discounted. The recycling process also provides for microbiological decontamination by high temperature during post-processing.

Ref. ANNEX II Table 1 (41) [20221202 Report UHasselt on measurement of microbial loads on JBF materials.pdf](#) JBF Global Europe - Microbial screening of PET-based samples

Article 10.3(g) - Recycling Facilities

Company	Address
JBF Global Europe	Nijverheidsweg 4, 2430 Laakdal, Belgium
JBF BAHRAIN W.L.	Building : 461, Road : 1508, Block : 115 ,P O Box : 50397, B I I P, Salman Industrial City, Al Hidd, Kingdom of Bahrain
NEO GROUP	Industrijos St. 2, LT-95346 Rimkai, Dovilai eldership, Klaipeda district, LT
Equipolymers GmbH	Equipolymers GmbH, Werk Schkopau, Building K80, 06258 Schkopau, DE
Novapet	Polígono Industrial Valle del Cinca s/n, 22300 Barbastro, Huesca, ES
CuRe Technology BV	Eerste Bokslootweg 17, 7821 AT Emmen, NL
Indorama Ventures Poland	ul. Krzywa Góra 19, 87-805 Włocławek, PL
Indorama Ventures Quimica	Poligono Industrial Guadarranque S/N 11360 San Roque, Cádiz, ES

Company	Address
Indorama Ventures Corlu PET	Karamehmet Mahallesi Avrupa Serbest Bölgesi 3. Sokak No:2 Ergene/Tekirdağ/Türkiye
Alpek Polyester UK Ltd	Wilton Site, Redcar, Cleveland, UK
Octal SAOC	FZC, Raysut Area, P.O.B. 383, PC 217, Salalah, Sultanate of Oman
PLASTIVERD, PET Reciclado S.A.	Avinguda Remolar, 2, 08820 El Prat de Llobregat (Barcelona), ES
Polyplex Corporation Limited	Lohia Head Road Village Amau Khatima - 262308, District- Udham Singh Nagar, Uttarakhand, India
Polyplex (Thailand) Public Company Limited	60/24, 60/91, 60/109, Siam Eastern Industrial Park Moo 3, Tambol Mabyangporn, Amphur Pluakdaeng, Rayong 21140, Thailand
Polyplex Europa Polyester Film Sanayi Ve Ticaret Anonim Sirketi	Karamehmet Mh. Avrupa Serbest Bolgesi 3. Sokak No: 4, Ergene/Tekirdag, Turkey
SELENIS PORTUGAL, S.A.	Quinta S. Vicente, Estrada Nacional 246, 7300-436 Portalegre, Portugal
Thai Shinkong Industry Co., Ltd. (TSIC)	No. 54, Harindhorn Bldg. 7th FL, North Sathorn Rd., Silom, Bangrak, Bangkok 10500, Thailand
Far Eastern New Century Corporation	No. 369&600, Sec. Yadong, Wunshan Rd., Xinpu Township, Hsinchu County, Taiwan, R.O.C.


Glossary

IV	Intrinsic Viscosity
Flake	Generic term for previously processed PET (Post Consumer, Post Industrial, Pellets, Regrind)
NIAS	Non-Intentionally Added Substances
SSP	Solid State Polycondensation
rPET	Recycled Polyethylene Terephthalate
VOC	Volatile Organic Compound
Blend Rate	Percentage of recycled, previously processed PET, added to the PET production process

ANNEX I

FLAKE INJECTION – PET Production Process

Key:
Flake – Pre-processed PET material
(Post Consumer, Post Industrial, Pellets, Regrind)

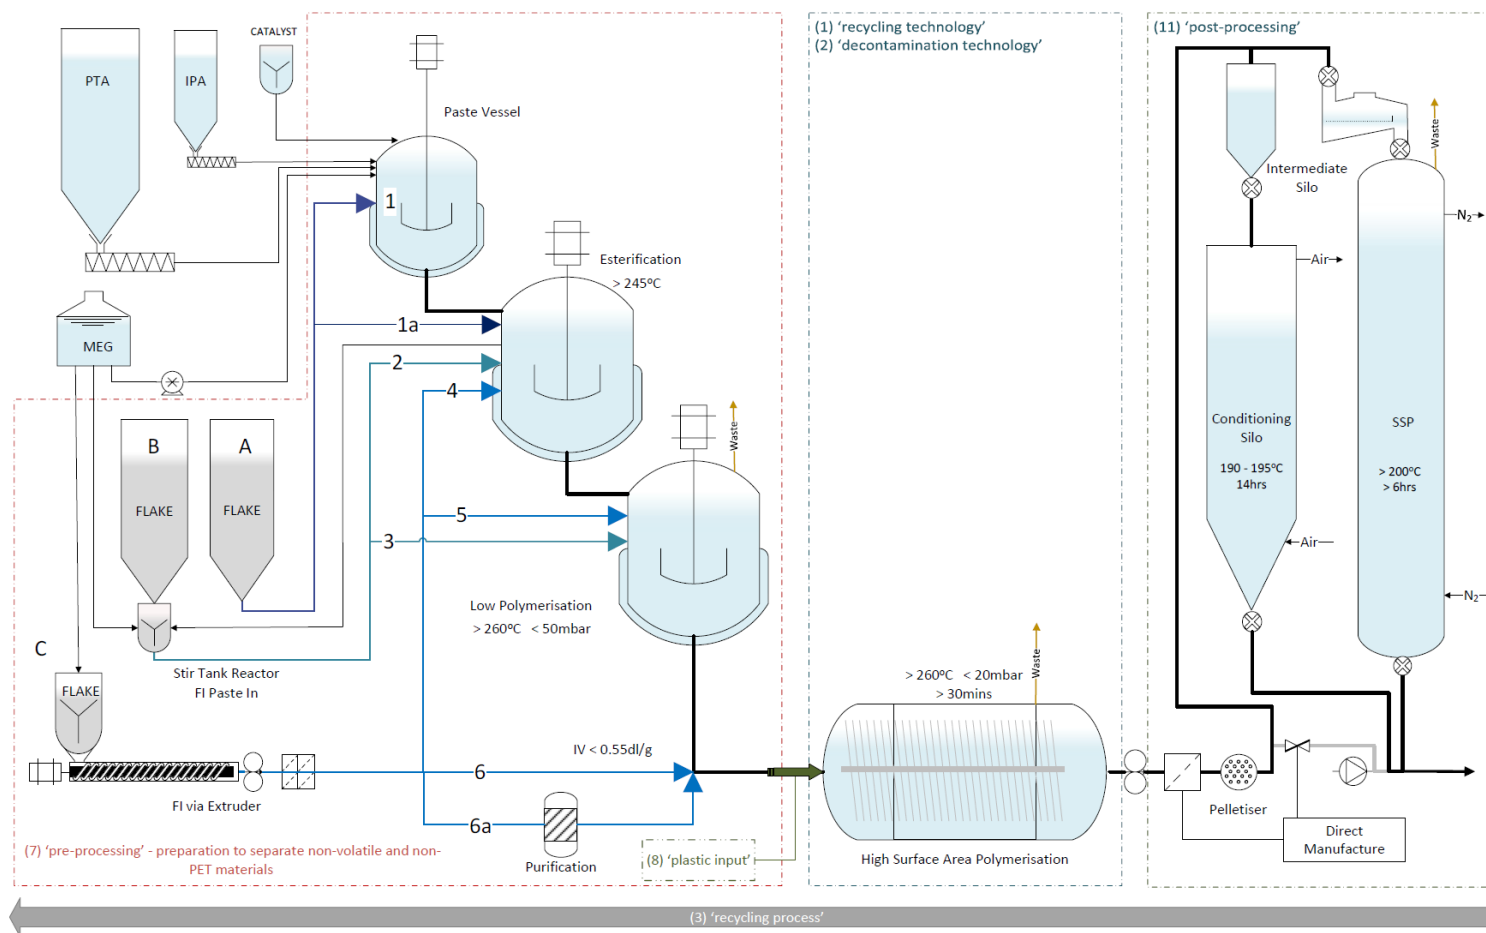

ANNEX II

(use Alt + left arrow to return to same place in this document)

Table 1. Documentation List

File Name:	Source:	Evidence Description:
FTR		
1. Decontamination efficiency of a new post-consumer poly(ethylene terephthalate) (PET) recycling concept.pdf	Food Additives and Contaminants, January 2008; 25(1): 123–131	Flake to Resin (FTR) recycling process decontamination efficiency
2. Fraunhofer_Dossier-FTR_20061109.pdf	Uhde Inventa-Fischer GmbH	Recycled Poly(ethylene terephthalate) for Direct Food Contact Application. Challenge Tests – 25%, 50%, 15% rPET Content.
Reversed Approach		
3. lchemical_recycling_submitted.pdf	Sustainability	Safety Evaluation of Polyethylene Terephthalate Chemical Re-cycling Processes
Equipolymers Paste-In		
4. 2012-EFSA Paste-in.pdf	Equipolymers GmbH	EFSA-Q-2009-00783 - EFSA refused to evaluate
5. petition_paste_in_confidential.pdf	Equipolymers GmbH	Petition Confidential 25% rPET – Fraunhofer Institute
6. petition_paste_in_public.pdf	Equipolymers GmbH	Petition (Public) 25% rPET – Fraunhofer Institute
Artenius		
7. EFSA_Letter Related to Artenius Unique Process.pdf	Plastiverd	EFSA-Q-2011-00969 - EFSA refused to evaluate
8. Fraunhofer Institute. Challenge Test.pdf	Plastiverd	Challenge-Test on the Artenius polymerisation process with the introduction of post-consumer flakes
US FDA Guidance		
9. Recycled-Plastics-Food-Packaging-Chemistry-Considerations-Guidance-04112022-1321	US FDA	Use of Recycled Plastics in Food Packaging (Chemistry Considerations): Guidance for Industry
NIAS		
10. 211110_Report rPET_2007.pdf	JBF Global Europe	NIAS Universidad de Zaragoza Sample 2007 Flakes & Pellets

File Name:	Source:	Evidence Description:
11. 211110_Report rPET_2002.pdf	Indorama	NIAS Universidad de Zaragoza Sample 2002 Flakes & Pellets
12. APE 80(RE30) Screening Test.pdf	JBF Global Europe	PET bottles with resins APE 80(RE30) Screening Test
13. CSI Screening Tests APE 80(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80(RE25) Screening Test
14. CSI Screening Tests APE 80FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80FRH(RE25) Screening Test
15. CSI Screening Tests APE 84FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 84FRH(RE25) Screening Test
16. 22-191-V.pdf	JBF Global Europe	Outgassing and VOC determination in PET samples APE80RE30 x 3
17. 22-351-V.pdf	JBF Global Europe	Outgassing and VOC determination in PET samples APE80RE30 x 2, BS342 APE80RE30, BS352 APE80 FRH RE25, APE80, Inlet Flake x 2
18. VOC analysis comparison Virgin PET - rPET.pdf	JBF Global Europe	VOC Comparison: APE80 Virgin -APE 80 FRH RE25 –APE 80 RE30
19. VOC analysis flakes inlet vs end regrade batches.pdf	JBF Global Europe	Inlet PCR flake versus APE 80 RE30 VOC Analysis Inlet PCR flake versus APE 80 FRH RE25 VOC Analysis
Migration		
20. 158- Migration testing report-DPET-D15-PO89253-250X593-0% cPCW.pdf	Alpek Polyester UK Ltd	Migration 0% rPET Content.
21. 160- Migration testing report- RDPET-D15-PO100092979-457X635-8% pPCW.pdf	Alpek Polyester UK Ltd	Migration 8% rPET Content.
22. 161- Migration testing report- RDPET-D15-PO100092492-776X910 -12% pPCW.pdf	Alpek Polyester UK Ltd	Migration 12% rPET Content.
23. 164- Migration testing report- RDPET with pPCW 16%-31032021 to 06042021- Phase II.pdf	Alpek Polyester UK Ltd	Migration 16% rPET Content.
24. 165- Migration testing report- RDPET with pPCW 25%-31032021 to 06042021- Phase II.pdf	Alpek Polyester UK Ltd	Migration 25% rPET Content.
25. APE 80(RE30) Migration Test Report.pdf	JBF Global Europe	PET bottles with resins APE 80(RE30) Migration Report
26. CSI Migration Tests APE 80(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80(RE25) Migration Report
27. CSI Migration Tests APE 80FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80FRH(RE25) Migration Report
28. CSI Migration Tests APE 84FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 84FRH(RE25) Migration Report
29. 2022 11 84 R0_84 R25_84 R30.xlsx	NEO GROUP	Migration Neopet 84FR (Virgin) v Neopet Cycle 84 FR R25 v Neopet Cycle FR R30

File Name:	Source:	Evidence Description:
30. Updated Mig Report 2020-1245Compliance APE 80(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80(RE25) Migration Report (25/01/2021)
31. Test report FDA, EU, ROHS etc for _RPET 100% 2021.pdf	Polyplex	100% rPET Clingfilm Wrapping Migration and Compliance
32. Test report OML-SML_Heavy metal NIAS Sarafil RPET 90% 2019.pdf	Polyplex	90% rPET A4 Films Migration and NIAS
Compliance Statements		
33. New EU Reg 2020,1245 Compliance 80(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80(RE25) Statement of Food Contact Compliance
34. One Page Mig Test Report APE 80(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80(RE25) Statement of Food Contact Compliance
35. One Page Mig Test Report APE 84FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 84FRH(RE25) Statement of Food Contact Compliance
36. One Page Mig Test Report APE 80FRH(RE25).pdf	JBF Global Europe	PET bottles with resins APE 80FRH(RE25) Statement of Food Contact Compliance
37. One Page Report APE 80(RE30).pdf	JBF Global Europe	PET bottles with resins APE 80(RE30) Statement of Food Contact Compliance
Manufacturers, distributors or importers of Final Materials and Articles		
38. 2201129_Ing.pdf	JBF Global Europe	Logoplaste 380ml Bottle JBF 30% rPET Migration Report
39. 2201129_NIAS.pdf	JBF Global Europe	Logoplaste 380ml Bottle JBF 30% rPET NIAS Report
40. Relatorio 2201129 Sensorial.pdf	JBF Global Europe	Logoplaste 380ml Bottle JBF 30% rPET Sensory Analysis
Microorganisms		
41. 20221202 Report UHasselt on measurement of microbial loads on JBF materials	JBF Global Europe	Microbial screening of PET-based samples